

Newton Server Frame

Introducing **Newton Server Frame**. Our **NSF** is a quality steel cabinet designed for ease of use with versatile mounting options. Sides and Doors are vented for heat dissipation. Several door options are available to accommodate specific project applications.

Moderately priced, this enclosure will interest cost conscience Project Planners. Call your CSR for a quote and more information.

Features:

1. Compatible with Newton Vertical cable managers (NSCM series) for side mounting cable management.
2. Cable access in top and base with additional hole pattern to allow cable rack to be attached directly to the cabinet, clearance holes in each corner of the top for attaching overhead support .
3. Equipment mounting uprights designed for EIA universal mounting using either 12-24, 10-32 or 6mm cage nuts, you choose your own configuration. The distance between the front and back uprights is easily adjustable.
4. Available in four different depths, 24", 30", 36" and 42"
5. Easily removable doors can be hung on either the left or right hand side of the frame depending on user application.
6. Detachable side panels, secured from the inside of the frame.


Note:

- **Mounting hardware and floor hardware options must be ordered separately**



NEWTON SERVER FRAME (NSF84)

Modified:02/03/2011

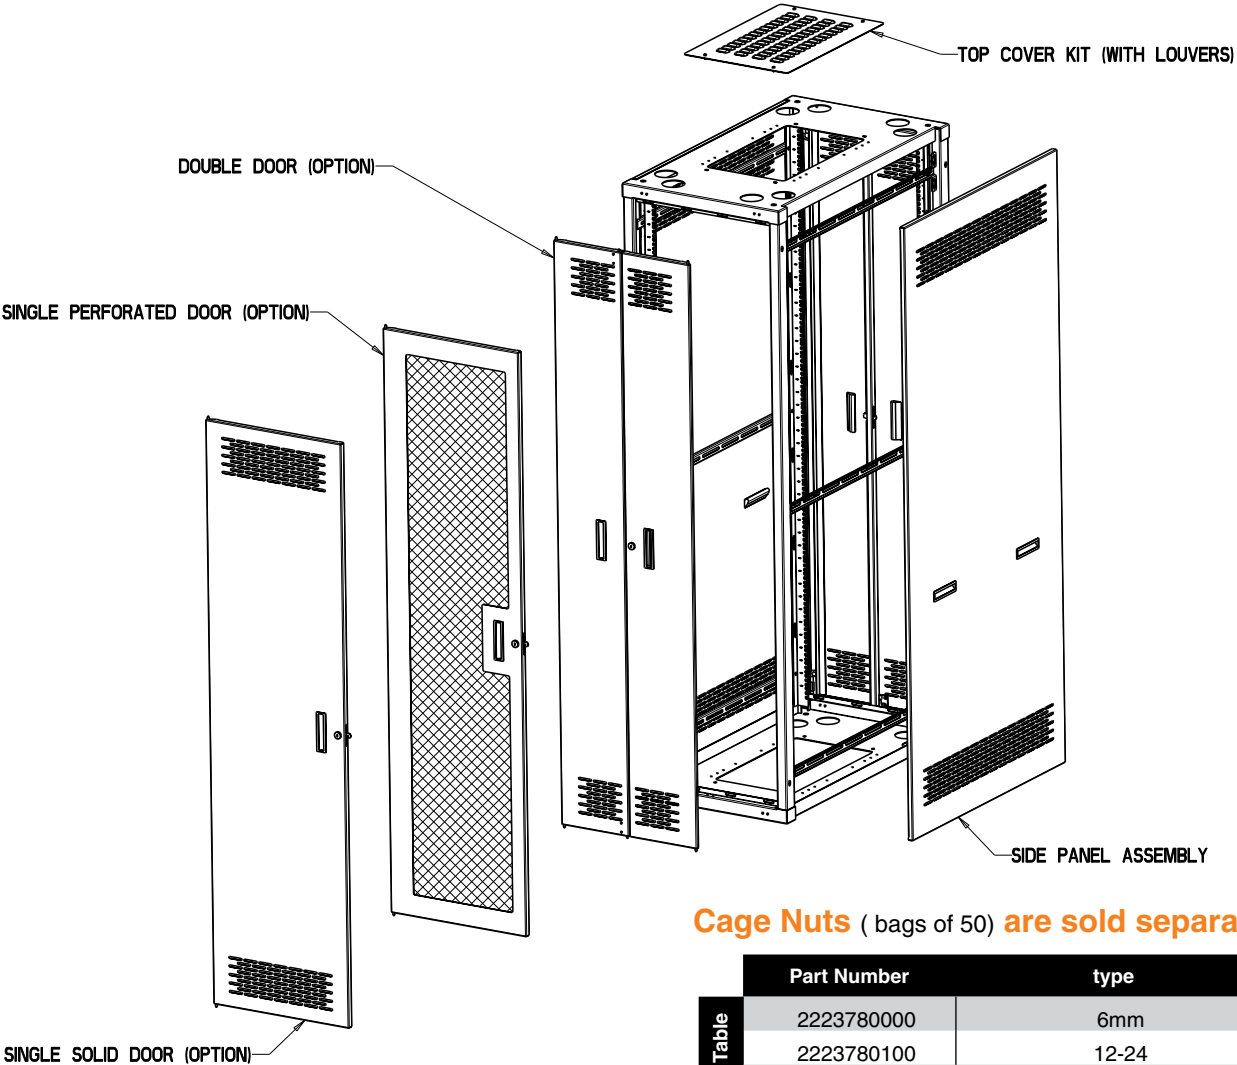

Cage Nuts (bags of 50) **are sold separately.**

		Part Number	type
Ordering Table		2223780000	6mm
		2223780100	12-24
		2223780200	10-32

NSF84 + AA + B + C + D + 47

NSF84	AA	B	C	D	47
NSF84: (7'-0" height)					XX: FINISH CODE 47 = BLaack
AA = DEPTH OF CABINET 24 = 24" deep 30 = 30" deep 36 = 36" deep 42 = 42" deep				D = SIDES 0 = No sides 1 = 2 x solid side covers (small air slots bottom and top)	
B = FAN OPTION. 0 = No fan, no cover 1 = no fan + cover 2 = 4 x 5" AC fans			C = DOOR OPTIONS 0 = No doors 1 = 2 x Single solid doors (small air slots bottom and top) 2 = 2 x Single perforated doors 3 = 2 x Double door assemblies (solid)		